


Color CCD Box Camera



KC-8530



- 380 TVL
- SHARP CCD+ SHARP DSP
- BLC Control
- AES Control
- Mirror Function

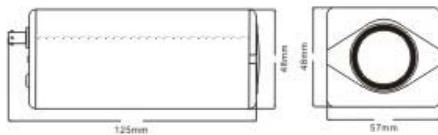

KC-8572



- 420 TVL
- SONY Super HAD CCD+ SONY DSP
- BLC Control
- AES Control
- AGC(Auto Gain Control) function



Specifications

Model	KC-8530	KC-8572
Sensor Chip	1/3" SHARP CCD+ SHARP DSP	1/3" SONY Super HAD CCD+ SONY DSP
Picture Element	NTSC:512(H)x492(V);PAL:512(H)x582(V)	NTSC:510(H)x492(V);PAL:500(H)x582(V)
Scanning Frequency	NTSC:15734Hz(H)60Hz(V);PAL:15625Hz(H) 50Hz(V)	
High Resolution	380 TV lines	420 TV lines
Sensitivity	0.5 Lux (F1.2)	0.1 Lux (F1.2)
Synchronizing System	Internal Sync., 2:1 Interface	
Auto White Balance	AUTO	
Auto Gain Control	AUTO	
Backlight Compensation	Auto ; ON/OFF Switchable	
S/N Ratio	More than 48dB (AGC OFF)	
Gamma	0.45	
Auto Electronic Shutter	【1/60(50)~1/100,000】 ; ON/OFF Switchable	
Video Output	1.0Vp-p75Ω	
Lens Mount	CS/C Mount	
Power Requirement	DC 12V / 150mA ; DC12V / AC24V (Dual Power) ; AC 90-264V(Switching Power) / 3.5W	
Dimension / Weight	125(D) x 57(W) x 48(H) mm ; 250g(DC) / 420g(AC)	
Operating Temperature	-10°C ~ +45°C	