


30M IR Day & Night CCD Camera



KC-7882E



- 420 TVL
- SONY Super HAD CCD+ SONY DSP
- 30M IR
- IP 67 Waterproof
- Auto BLC function
- Auto AES function
- Auto AGC function
- DC12V;AC24V ; AC90-264V switching power

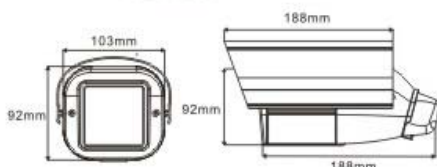

Specifications	
Sensor Chip	1/3" SONY Super HAD CCD + SONY DSP
Picture Element	NTSC: 510 (H) × 492 (V) PAL: 500 (H) × 582 (V)
Scanning Frequency	NTSC:15734Hz(H) 60Hz(V) PAL:15625Hz(H) 50Hz(V)
High Resolution	420 TV lines
Sensitivity	Color mode automatically switches to B/W mode under 2 Lux 0.1 Lux (IR OFF) ; 0 Lux (IR ON)
Infrared Ray LED	48 PCS ;(30° LED for 6/8mm Lens;45° LED for 4mm Lens)
Infrared Ray Distance	30 Meters
IR Wavelength	850 nm
Synchronizing System	Internal Sync., 2:1 Interlace
Auto White Balance	Auto
Auto Gain Control	Auto
Backlight Compensation	Auto
S/N Ratio	More than 48dB (AGC OFF)
Gamma	0.45
Electronic Shutter	Auto 【 1/60(50)~1/110,000 】
Video Output	1.0Vp-p75Ω
Lens Mount	6mm Standard Board Lens (8 / 12 / 16 mm Optional)
Heater Function	Optional ; ON → 0℃, OFF → 5℃
Blower Function	Auto ; ON → 40℃, OFF → 25℃
Power Requirement	DC 12V (1A Adaptor for IR ON) (AC24V Power optional ; AC 90-264V switching power optional)
Dimension / Weight	103(W) x 92 (H) x 188(D) mm ; 800g
Operating Temperature	-10℃ ~ + 50℃