


## 30M IR High Res. Day & Night CCD Camera

### KC-7885



- 520 TVL
- 1/3" High Res. CCD + SONY 11X DSP
- 30M IR
- IP 67 Waterproof
- Auto BLC(BackLight Compensation) function
- Auto AES(Auto Electronic Shutter) function
- Auto AGC(Auto Gain Control) function
- DC12V ; AC24V ; AC90-264V switching power

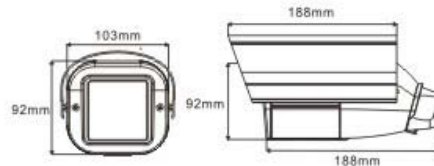

### Specifications

Sensor Chip	1/3" Hi-Res. CCD + SONY 11X DSP	
Picture Element	NTSC: 768 (H) × 494 (V)	PAL: 752 (H) × 582 (V)
Scanning Frequency	NTSC:15734Hz(H) 60Hz(V)	PAL:15625Hz(H) 50Hz(V)
High Resolution	520 TV lines	
Sensitivity	Color mode automatically switches to B/W mode under 2 Lux 0.05 Lux (IR OFF) ; 0 Lux (IR ON)	
Infrared Ray LED	48 PCS ;(30° LED for 6-8mm Lens;45° LED for 4-6mm Lens)	
Infrared Ray Distance	30 Meters	
IR Wavelength	850 nm	
Synchronizing System	Internal Sync., 2:1 Interlace	
Auto White Balance	Auto	
Auto Gain Control	Auto	
Backlight Compensation	Auto	
S/N Ratio	More than 50dB (AGC OFF)	
Gamma	0.45	
Electronic Shutter	Auto 【 1/60(50)~1/110,000 】	
Video Output	1.0Vp-p75Ω	
Lens Mount	6mm Standard Board Lens (8 / 12 / 16 mm Optional)	
Heater Function	Optional ; ON → 0℃, OFF → 5℃	
Blower Function	Auto ; ON → 40℃, OFF → 25℃	
Power Requirement	DC 12V ( 1A Adaptor for IR ON) ( AC24V Power optional ; AC 90-264V switching power optional )	
Dimension / Weight	103(W) x 92 (H) x 188(D) mm ; 800g	
Operating Temperature	-10℃ ~ + 50℃	